



Pivot line
Deco line

pivot doors
steel look doors

Pivot line pivot Doors

Our vision is simple. Vision. Being able to see exactly what you want: your view, not your window or door.

We specialise in installing frameless doors and windows in homes and commercial buildings around the world.

We take glazing to a whole new level, by making a picture window have the facility to open removing the divide between the outside and inside. We are committed to product development of our systems to ensure we are always at the forefront of glazing technologies.



Key Features

- Utilise the natural strength of aluminium and glass to create slim thermally broken profiles
- Low maintenance hard wearing powder coated aluminium
- 35mm sight lines
- Multi point locking system
- U values from 1.2W/M²k
- Single and double doors. Can be incorporated into the Vision line sliding system.
- 4-6 week lead times
- A variety of glazing options including solar control and easy clean



3



Deco line steel effect aluminium doors



4

Our in-house CAD team can assist from planning to completion to ensure a smoothly run project.


With multiple configurations available – your imagination is the limit.

If we haven't done it, we will try and find a way to make your dreams possible.



Key Features


- Utilise the natural strength of aluminium and glass to create slim thermally broken profiles
- Low maintenance hard wearing powder coated aluminium
- 35mm sight lines
- Multi point locking system
- U values from 1.4W/M²k
- Single, French doors, French doors with side screens
- 4-6 week lead times
- A variety of glazing options including solar control and easy clean

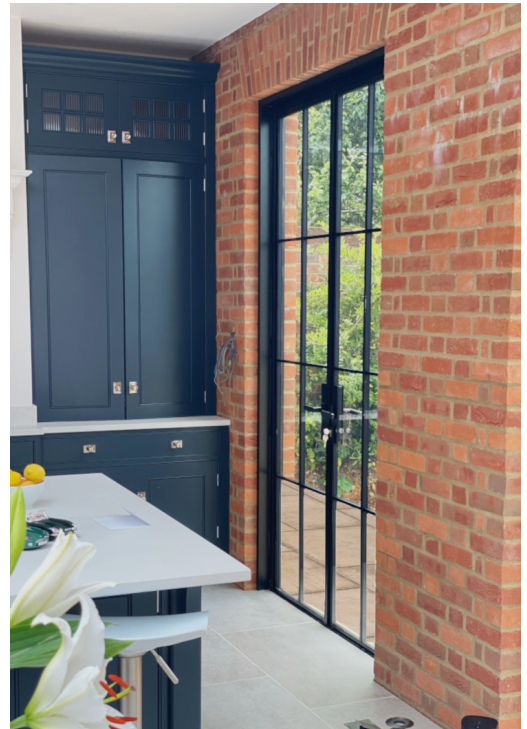

5



Configurations

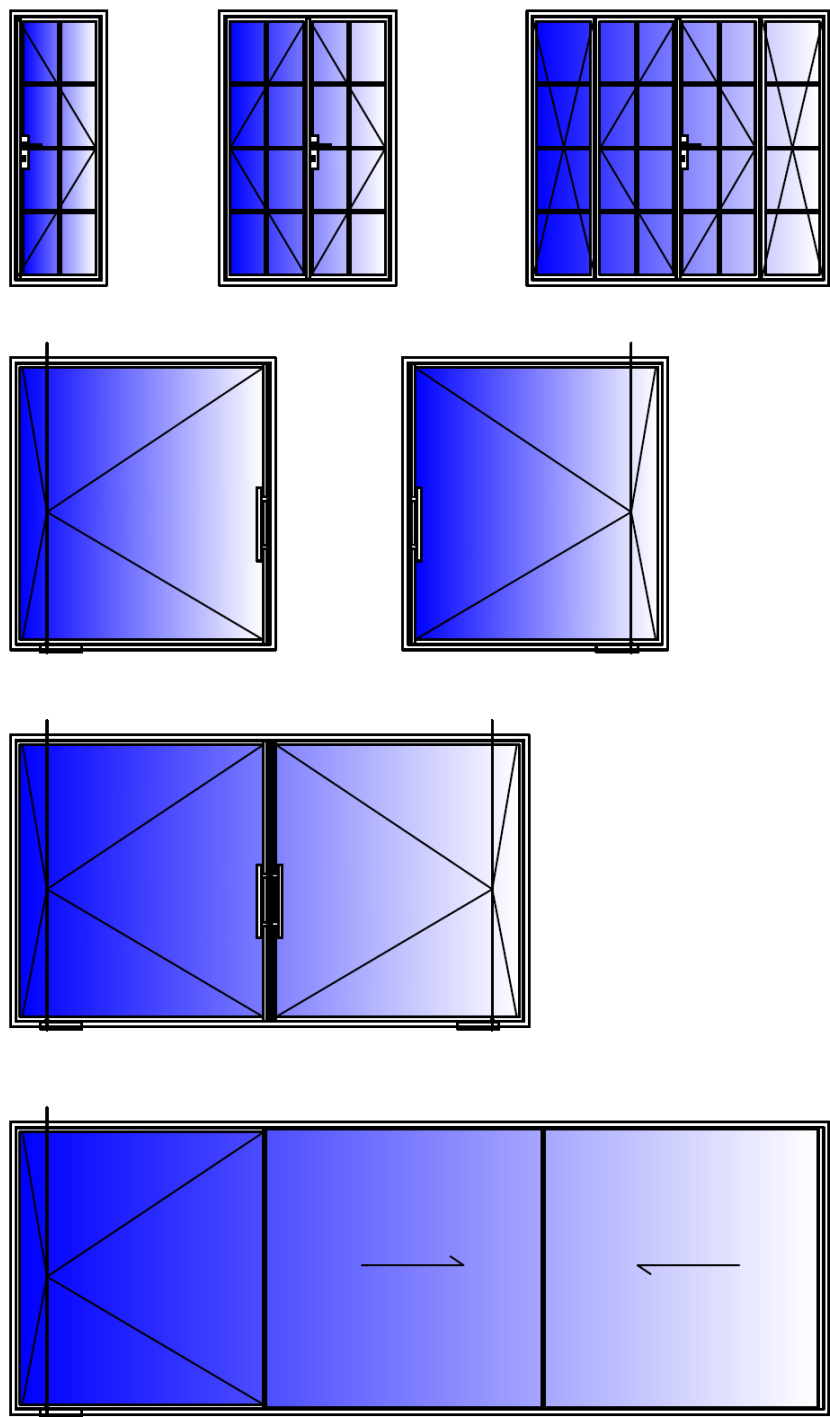

Specification Data

Applications	All general light applications.
Features	Deco line and Pivot Line doors incorporates frameless design with 35mm sightlines allowing for as much daylight as possible. Recessed tracks allow for as little interrupted views as possible. Highly efficient double glazed units with thermally broken aluminium allow for low U values.
Colour	Aluminium able to be painted to any RAL, Syntha Pulvin and BS colours.

Performance

	While all calculations such as wind-loading, U-values, size and weight limitations are calculated on a project basis these are the average values for an average casement.
U Values	1.4W/m ² K (Using a 1.1W/m ² K glass unit)
Wind Resistance	EN 12210:2000 Class C5
Water Tightness	Flush threshold requires a protected opening not advisable for exposed location
Air Permability	
Document Q	Compliant
Document L	Compliant

Dimensions

Maximum Dimension	Each panel can go 3000mm high by 2000mm, please enquire if you would like to go outside these sizes.
Maximum Weights	300kg – enquire if you would like to go outside this weight.
Frame Depth	44mm
Glazing Thickness	32mm double glazed units

